


UV stable pipes



KOPOFLEX - flexible doublecoat corrugated pipe

	outside diameter (mm)	inside diameter (mm)	package (m)	package (kg)
KF 09040	40	32	50	9,5
KF 09050	50	41	50	13
KF 09063	63	52	50	15,7
KF 09075	75	61	50	18,7
KF 09090	90	75	50	27
KF 09110	110	94	50	34,5
KF 09160	160	136	50	46

UV stable double-coated pipe designed for mechanical protection of all kinds of power and data wiring.
Mechanical resistance: >450 N / 20 cm
Color: black

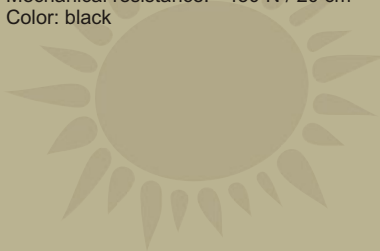

Flexible pipe for a mechanic protection of cables

	outside diameter (mm)	inside diameter (mm)	package (m)	package (kg)
APAFS16	15,8	11,8	50	2
APAFS21	21,2	16,5	50	3,2
APAFS28	28,5	22,6	50	5,8
APAFS34	34,5	28,8	50	8,4
APACS42	42,5	35,2	25	5,2
APACS54	54,5	46,5	25	6,1
APACS80	79,3	67,3	10	3,6

Flexible UV stable halogen-free self-snuffing pipe made of PA 6. It is used in premises where human resources and valuable property protection, damage minimization in case of fire, further on it is used for machinery, public buildings and railways.
Mechanical resistance: 350 N / 5 cm
Color: black

Flexible wiring pipe

Flexible UV stable pipe made of PE. Suitable for outside installation. Pipe is available with pull-out wire as well.
Mechanical resistance: 320 N / 5 cm
125 N / 5 cm

Color: black

Per order only.

	outside diameter (mm)	inside diameter (mm)	package (m)	package (kg)
low mechanical resistance (320 N)				
2316E/LPE-1 UVF-	16	10,7	100	5,2
2320/LPE-1 UVF-	20	14,1	100	6,5
2325/LPE-1 UVF-	25	18,3	100	9,1
2332/LPE-1 UVF-	32	24,3	50	4,8
2340/LPE-1 UVF-	40	31	25	3,4
very low mechanical resistance (125 N)				
2316E/LPE-2 UVF-	16	10,7	100	3,6
2320/LPE-2 UVF-	20	14,1	100	5
2325/LPE-2 UVF-	25	18,3	100	7,8
2332/LPE-2 UVF-	32	24,3	50	3,3
2340/LPE-2 UVF-	40	31	25	3

Rigid wiring pipe

UV stable halogen-free rigid socket pipe made of PPO. Suitable for housing and industrial distribution in hospitals, schools, IT centers, etc. Suitable for environments with increased need of people and equipment protection. Tested with flaming loop 960 °C. Suitable for installing in dangerous zone 2 in explosive areas.

Mechanical resistance: 320 N / 5 cm
750 N / 5 cm
1250 N / 5 cm

Color: black

	outside diameter (mm)	inside diameter (mm)	package (m)	package (kg)
low mechanical resistance (320 N)				
1516EHF FA	16	13,7	30	2,1
1520HF FA	20	17,4	30	2,5
1525HF FA	25	22,1	30	3,4
1532HF FA	32	28,6	30	4,6
1540HF FA	40	35,8	30	6,8
1550HF FA	50	45,1	30	10,3
1563HF FA	63	57	15	6,7
medium mechanical resistance (750 N)				
4016EHF FA	16	13	30	3
4020HF FA	20	16,9	30	3,4
4025HF FA	25	21,4	30	4,9
4032HF FA	32	27,4	30	6,4
4040HF FA	40	35,4	30	8,6
4050HF FA	50	44,3	30	9,9
4063HF FA	63	58	15	8,7
high mechanical resistance (1250 N)				
8016EHF FA	16	12,2	30	3,7
8020HF FA	20	15,8	30	4,3
8025HF FA	25	20,6	30	5,9
8032HF FA	32	26,6	30	8
8040HF FA	40	34,4	30	10,1
8050HF FA	50	43,2	30	14
8063HF FA	63	57	15	10

