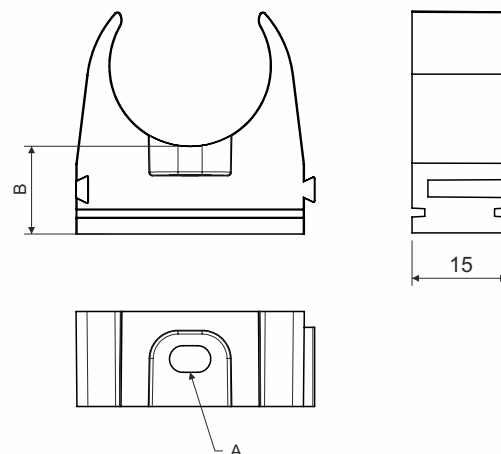



product description:

clamps are designed for fixing the pipe installations on the base surface
 pipes are installed by pushing between the clamp jaws
 the clamps are equipped with fastening elements for placing next to each other to create continual row thereof as well as with grooves for installation in supporting trunkings of 5820/.. series
 the connection can be made for clamps of different sizes
 possibility to install in places with risk of flammable gases and vapor – danger zone 2
 possibility to install in places with explosive risk of dust – danger zone 22

material: PVC

color: white RAL 9003, light gray RAL 7035, dark gray RAL 7012, black RAL 9005

self-snuffing: yes, within 30 s

temperature resistance: -25 - +60 °C

fire class for underlying material: A1-F

UV stable: no

classification code according to EN 61386-25: 2441410

mechanical protection according to EN 50102: IK09

meets the requirements: EN 61386-1 ed.2:09, EN 50102

storage: ČSN 64 0090



chemical resistance: YES: amoniak 25%, distilled water, ethanol 50%, sodium hydroxide 60%, hydrofluoric acid 40%, acetic acid 5%, sulfuric acid 96%, medicinal oil, methanol, olive oil, petroleum, hydrogen peroxide 20%, transformer oil, sodium carbonate
 NO: aceton, benzen, phenol solution 5%, chlorinated hydrocarbons, tetrachlorocarbon

clamps are not a breeding ground for bacteria, tested in SZÚ according to ČSN EN ISO 846:2019

list of bacteria that have been tested:

ESCHERICHIA COLI, STAPHYLOCOCCUS AUREUS, KLEBSIELLA PNEUMONIAE, PSEUDOMONAS AERUGINOSA, ENTEROCOCCUS FAECALIS, BACILLUS SUBTILIS, SALMONELLA ENTERICA, LEGIONELLA PNEUMOPHILA, CANDIDA ALBICANS

item number	outer Ø pipe (mm)	A (mm)	B (mm)	weight (g/pc)	package (pcs)	color	for pipes
5316E_FB	16	4,3x6,5	12	6	10 / 100 / 500	black RAL 9005	
5316E_HB	16	4,3x6,5	12	6	10 / 100 / 500	white RAL 9003	1416E
5316E_KA	16	4,3x6,5	12	6	100	light gray RAL 7035	1216E
5316E_KB	16	4,3x6,5	12	6	10 / 100 / 500	light gray RAL 7035	1516E
5316E_LA	16	4,3x6,5	12	6	100	dark gray RAL 7012	4016E
5316E_LB	16	4,3x6,5	12	6	10 / 100 / 500	dark gray RAL 7012	8016E
5320_FB	20	4,3x6,5	12	7	10 / 100 / 500	black RAL 9005	
5320_HB	20	4,3x6,5	12	7	10 / 100 / 500	white RAL 9003	1420
5320_KA	20	4,3x6,5	12	7	100	light gray RAL 7035	1220
5320_KB	20	4,3x6,5	12	7	10 / 100 / 500	light gray RAL 7035	1520
5320_LA	20	4,3x6,5	12	7	100	dark gray RAL 7012	4020
5320_LB	20	4,3x6,5	12	7	10 / 100 / 500	dark gray RAL 7012	8020
5325_FB	25	4,3x6,5	12	10	10 / 100 / 600	black RAL 9005	
5325_HB	25	4,3x6,5	12	10	10 / 100 / 600	white RAL 9003	1425
5325_KA	25	4,3x6,5	12	10	100	light gray RAL 7035	1225
5325_KB	25	4,3x6,5	12	10	10 / 100 / 600	light gray RAL 7035	1525
5325_LA	25	4,3x6,5	12	10	100	dark gray RAL 7012	4025
5325_LB	25	4,3x6,5	12	10	10 / 100 / 600	dark gray RAL 7012	8025
5332_FB	32	5x10	14	14	10 / 100 / 740	black RAL 9005	
5332_HB	32	5x10	14	14	10 / 100 / 740	white RAL 9003	1432
5332_KA	32	5x10	14	14	100	light gray RAL 7035	1232
5332_KB	32	5x10	14	14	10 / 100 / 740	light gray RAL 7035	1532
5332_LA	32	5x10	14	14	100	dark gray RAL 7012	4032
5332_LB	32	5x10	14	14	10 / 100 / 740	dark gray RAL 7012	8032
5340_FB	40	5x10	14	17	10 / 100 / 400	black RAL 9005	1440
5340_HB	40	5x10	14	17	10 / 100 / 400	white RAL 9003	1240
5340_KB	40	5x10	14	17	10 / 100 / 400	light gray RAL 7035	1540
5340_LB	40	5x10	14	17	10 / 100 / 400	dark gray RAL 7012	4040
5350_FB	50	6,6x10,2	14	21	10 / 100 / 350	black RAL 9005	8040
5350_HB	50	6,6x10,2	14	21	10 / 420	white RAL 9003	1450
5350_KB	50	6,6x10,2	14	21	10 / 100 / 350	light gray RAL 7035	1250
5350_LB	50	6,6x10,2	14	21	10 / 100 / 350	dark gray RAL 7012	1550
5363_FB	63	6,6x10,2	14	29	10 / 240	black RAL 9005	4050
5363_HB	63	6,6x10,2	14	29	10 / 240	white RAL 9003	8050
5363_KB	63	6,6x10,2	14	29	10 / 240	light gray RAL 7035	1563
5363_LB	63	6,6x10,2	14	29	10 / 240	dark gray RAL 7012	4063

recycling symbols:



clamps



foil, bag



carton

risks associated with product use:

- during installation, use appropriate protective work equipment and follow safety guidelines
- use the product only for the purposes intended by the manufacturer
- use the product in an environment that complies with the manufacturer's instructions
- do not use the product if it is damaged
- follow the manufacturer's recommendations