

height of cable ladder: 110 mm

length of cable ladder: 3000 mm

distance of rungs: 300 mm

metal sheet thickness of sidewalls: 1,5 mm

metal sheet thickness of rungs: 1,2 mm

**product description:** Cable ladder is designed to create a cable route. It allows you to create horizontal, vertical and inclined routes. The cable ladder consists of sidewalls and rungs, this design allows better cooling of cables. Perforated sidewalls create the L-profile with a bended tag. Perforated rungs of the C-profile are attached to the sidewalls by pressing through in the distance of 300 mm with the open side of the profile upwards. The cables are fastened to the rungs using PKC 1 cable clamps. Connection of ladders is carried out using couplings S 110X200 and using min. 8 pieces of screws NSM 6X10. It is possible to create on order the ladders with rung spacing of 150 and 450 mm.

**surface finish:** S - Pre-Galvanized according to EN 10346, EN 10143, zinc-layer 15-27 µm  
 F - Hot Dip Galvanized according to EN ISO 1461  
 sidewalls - zinc-layer 55 µm (min. 45 µm)  
 rungs - zinc-layer 45 µm (min. 35 µm)  
 ZM - galvanized steel with admixture of magnesium and aluminum according to EN 10346, EN 10143, protective layer 18-31 µm

sales amount: 3 m


meets the requirements: ČSN EN 61537:02

**classification** 🔥: ČSN 73 0895 P 90-R  
 DIN 4102-12 E 90  
 STN 92 0205 PS 90  
 Fire classification is depend on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire

storage: ČSN EN 60721-3-1

item number	A (mm)	weight (kg/m)	🔥
<b>KL 110X150_S</b>	150	3,18	🔥
<b>KL 110X150_F</b>		3,56	🔥
<b>KL 110X200_S</b>	200	3,31	🔥
<b>KL 110X200_F</b>		3,71	🔥
<b>KL 110X200_ZM</b>		3,31	🔥
<b>KL 110X300_S</b>	300	3,53	🔥
<b>KL 110X300_F</b>		3,95	🔥
<b>KL 110X300_ZM</b>		3,53	🔥
<b>KL 110X400_S</b>	400	3,75	🔥
<b>KL 110X400_F</b>		4,20	🔥
<b>KL 110X400_ZM</b>		3,75	🔥
<b>KL 110X500_S</b>	500	4,00	🔥
<b>KL 110X500_F</b>		4,44	🔥
<b>KL 110X500_ZM</b>		4,00	🔥
<b>KL 110X600_S</b>	600	4,20	🔥
<b>KL 110X600_F</b>		4,70	🔥
<b>KL 110X600_ZM</b>		4,20	🔥

The graph shows the maximum allowed even loading of the ladder in relation to the distances of the supports.

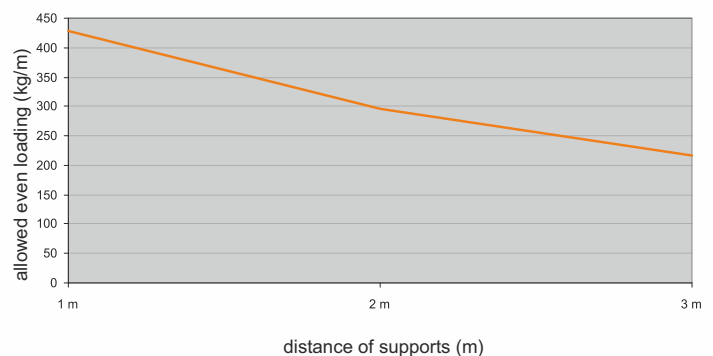

 **WARNING****Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

**Risk of system collapse**

It is essential to strictly adhere to the maximum load limits for individual cable support systems and ensure proper installation according to the installation manual. The load capacity charts for each system are provided in the manufacturer's catalog, available in printed form or on the manufacturer's website. The specified load limits do not account for any additional loads, such as snow, wind, or seismic forces.

**Electricity injury**

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

**Safe Use**

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



cable ladder