

type number	max. load (kg)	weight (kg/pc)	thickness of metal sheet (mm)	
ZVB 1.5_S	60	0,02	1	



product description: The outer side hanger is used to suspend cable trays running through cable ladders from the ZT 8 threaded rod. The hanger is attached to the tray by snapping the protrusions on the hanger into the sidewalls of the ladder. The threaded rod ZT 8 is attached using a PD 8 washer and M 8 nut. 1 mounting point is created with 2 pieces of ZVB 1.5. The product is protected by the utility model.




surface finish: S - Pre-Galvanized according to EN 10346, EN 10143, zinc-layer 15-27 µm

sales amount: 1 pc

classification : ČSN 73 0895 P 90-R
DIN 4102-12 E 90
STN 92 0205 PS 90

Fire classification depends on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire.

storage: ČSN EN 60721-3-1

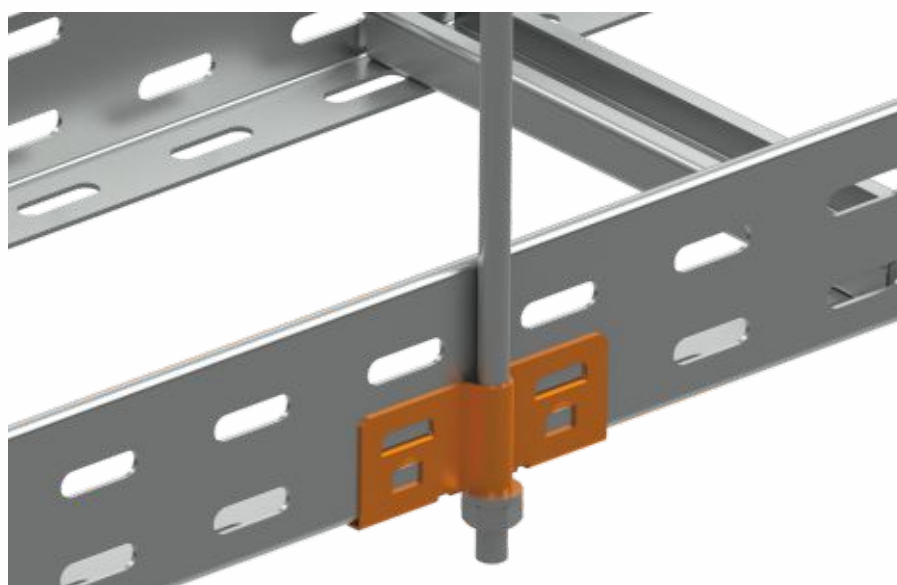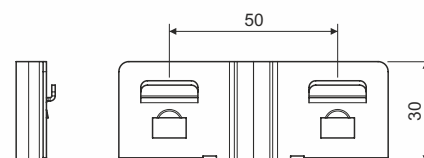

 WARNING**Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

Electricity injury

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



ZVB 1.5



cardboard