
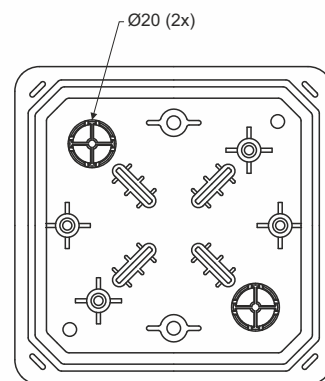


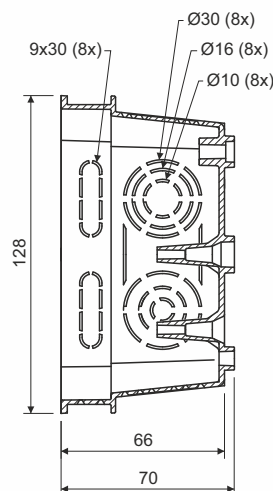

product description:

designed for distribution system with voltage 400 V and with maximum current 16 A
a large number of knockouts for introducing cables and pipes
possibility to install the support trunking TS35
possibility to set the cover in a horizontal position
possibility to break the sidewall for easier cable handling

material: PVC

color: grey

self-snuffing: yes, within 30 s

temperature resistance: -5 - +60 °C

flaming loop test: 850 °C

fire class for underlying material: A1-D

weight: 193 g

meets the requirements: ČSN EN 60670-1, ČSN EN IEC 60670-1 ed. 2:21

storage: ČSN 64 0090

KO 100 E_KA - 1 pc box with lid KO 100 V E and screws in foil, 42 pcs boxes in a carton

accessories:

terminal plate S-66; S-96; SP-96
equipotential terminal plate EPS 3
screwless terminal plates TYP015, TYP016, TYP017, TYP018
support trunking TS35

recycling symbols:



 WARNING

risks associated with

using the products: incorrect electrical installation can cause a fire - we recommend the connection to be carried out exclusively by an authorized person
follow the manufacturer's installation instructions according to the installation instructions and videos
damage to the product - if the box is visibly damaged, stop using it
under normal and foreseeable conditions of use, the installed box does not pose any risks to consumers