


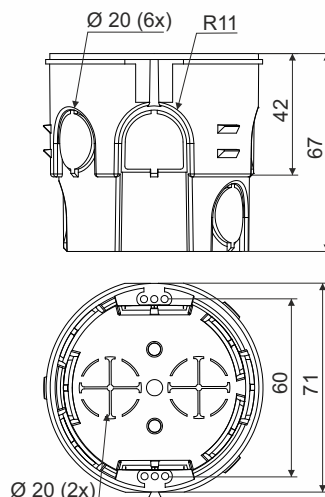

product
description:

designed for distribution system with voltage 400 V and with maximum current 16 A
easy installation of devices with big depth
possibility to join into and continuous series with and spacing of 71 mm (up to 3 boxes)
boxes can be joined with boxes KP 68/2 and KP 68
possibility to easily clamp under the device using screwless terminals
allows to install double-socket

material: PVC

color: gray

self-snuffing: yes, within 30 s

temperature resistance: -5 - +60 °C

flaming loop test: 850 °C

fire class for underlying material: A1-D

weight: 43 g

meets the requirements: ČSN EN 60670-1, ČSN EN IEC 60670-1 ed. 2:21

storage: ČSN 64 0090

KPR 68_KA - package: 10 pcs in foil, 100 pcs in carton

accessories:

cover V 68
blind cover ZV 68
extending frames NR 5X5; NR 68/6, NR 68/10
screwless terminal plates TYP015, TYP016, TYP017, TYP018

auxiliary tools:

non-hammered masonry cutter FR 68 SDS

recycling symbols:



box



cardboard



foil

 WARNING

risks associated
with

using the products: incorrect electrical installation can cause a fire - we recommend the connection to be carried out exclusively by an authorized person
follow the manufacturer's installation instructions according to the installation instructions and videos
damage to the product - if the box is visibly damaged, stop using it
under normal and foreseeable conditions of use, the installed box does not pose any risks to consumers