


type number	A (mm)	B (mm)	H (mm)	thickness of metal sheet (mm)	hweight (kg/pc)	🔥
NVO 45x62_S	62	125	12	0,55	0,08	🔥
NVO 45x62_F				0,6	0,11	🔥
NVO 45x125_S	125	151	12	0,55	0,16	🔥
NVO 45x125_F				0,8	0,27	🔥
NVO 45x250_S	250	203	12	0,55	0,36	🔥
NVO 45x250_F				0,8	0,62	🔥
NVO 45x500_S	500	307	15	0,7	1,2	🔥
NVO 45x500_F				0,8	1,62	🔥

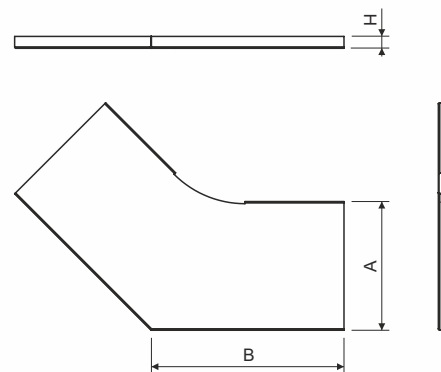

product description: This cover is used to cover the elbow 45°.
To fix the cover use 3 pcs of cover fixtures VU or NUV.
These items can also be ordered in a varnished version.


surface finish: S - Pre-Galvanized according to EN 10346, EN 10143, zinc-layer 15-27 µm
F - Hot Dip Galvanized according to ČSN EN ISO 1461, zinc-layer 45 µm (min. 35 µm)

sales amount: 1 pc

meets the requirements: ČSN EN 61537:02

classification 🔥: ČSN 73 0895 P 90-R
DIN 4102-12 E 90
STN 92 0205 PS 90
Fire classification depends on the specific conditions of the cable tray, detailed in the catalog Cable management systems - Fire resistant systems.

storage: ČSN EN 60721-3-1

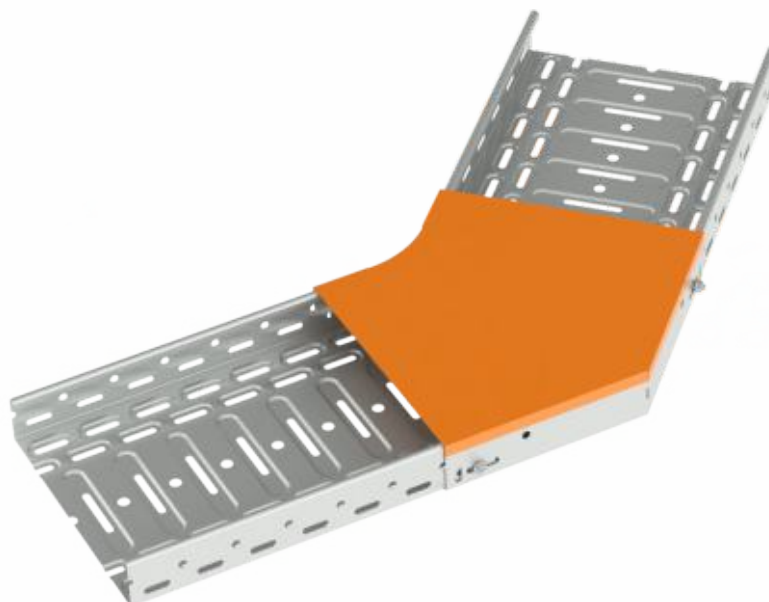

 WARNING**Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

Electricity injury

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



NVO 45